



GS10A THRU GS10M

Thermal Characteristics (°C)

PARAMETER	SYMBOL	UNIT	GS10A	GS10B	GS10D	GS10G	GS10J	GS10K	GS10M

Ordering Information

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GS10A~GS10M						

Characteristics

FIG.1: I_o-T_L Curve

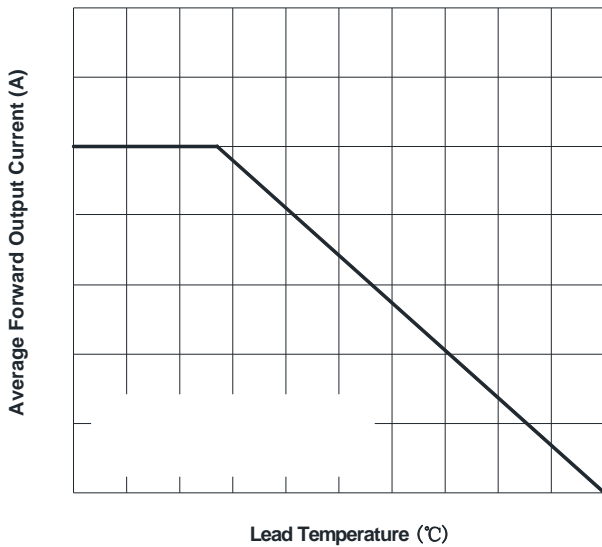


FIG.2: Forward Surge Current Capability

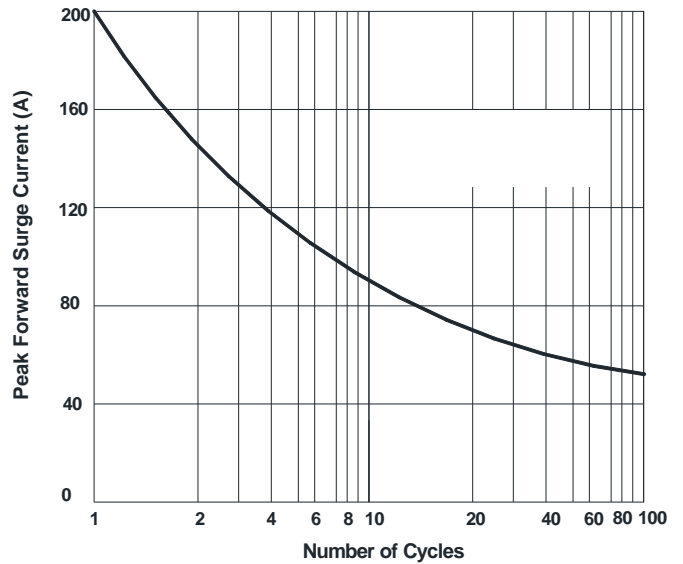


FIG.3: Typical Forward Voltage


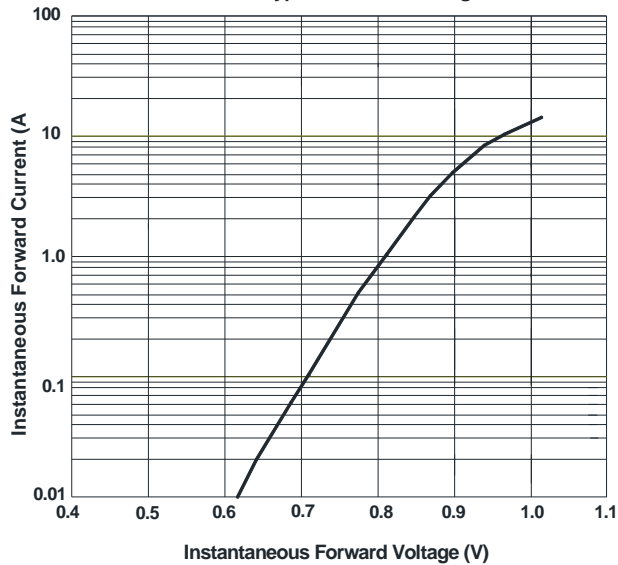



FIG.4: Typical Reverse Characteristics



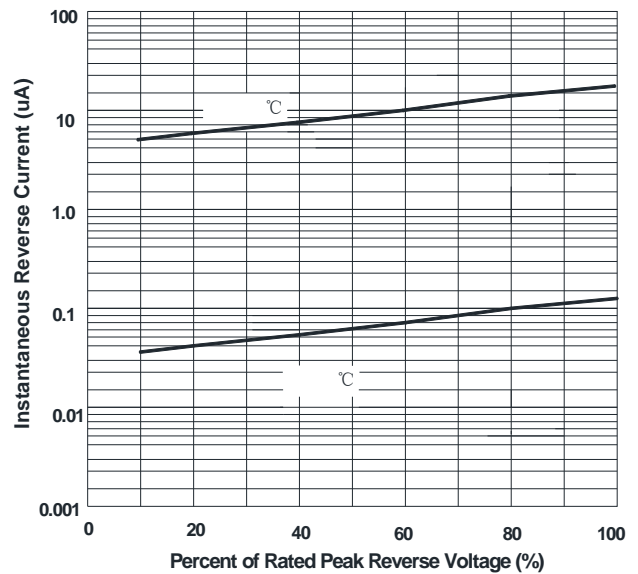


GS10A THRU GS10M

Outline Dimensions

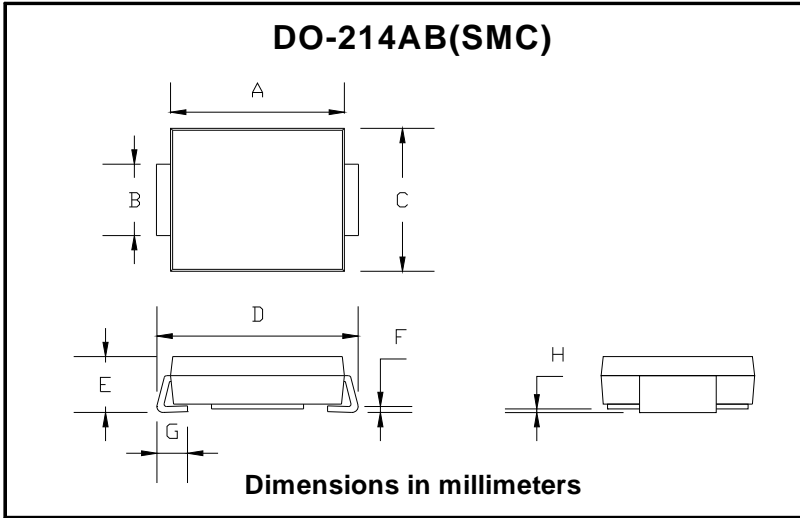

Suggested pad layout

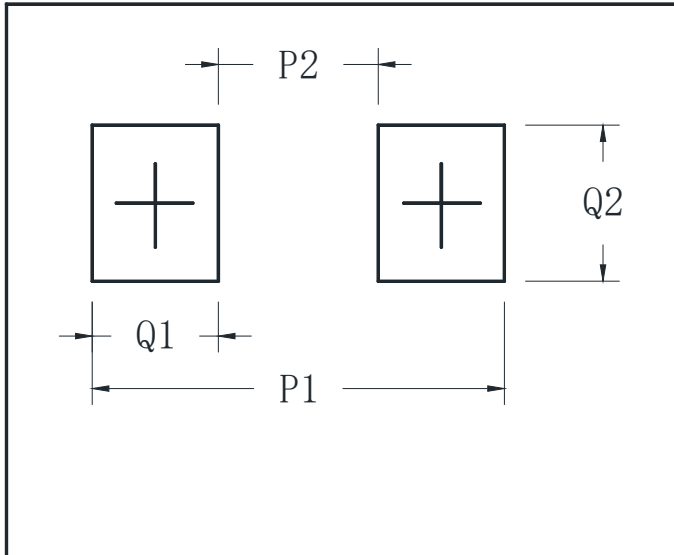

DO-214AB (SMC)



GS10A THRU GS10M

Disclaimer
